


COLOURED FLATBACK PAPER TAPE

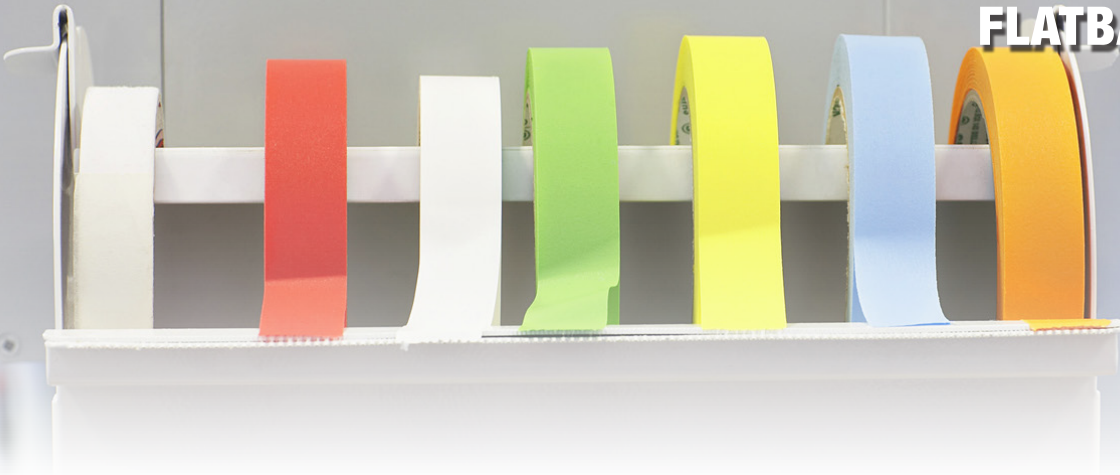

PRODUCT DESCRIPTION

Bright, colourful flatback papers coated with a natural rubber adhesive. The flat surface (vs. creped paper) results in high quality printing. Easy unwind characteristic for high speed printing. Tape exhibits high face to face bond strength. Used for flexographic printing, colour coding and identification (write-on surface). Specifications: Meets ASTM D6123, Type II; CID A-A-883B, Type II.

PHYSICAL PROPERTIES

Backing:	Kraft flatback
Adhesive:	Natural rubber
Total Thickness:	5.8 mils
Tensile Strength:	32 lb/in
Adhesion:	31 oz/in
Elongation:	3%
Core I.D.:	3" neutral core

STANDARD WIDTHS

6 mm, 12 mm, 18 mm, 24 mm, 36 mm, 48 mm
Custom widths available

STANDARD LENGTHS

55 metres (60 yards)

RECOMMENDED STORAGE CONDITIONS

The product should be stored at room temperature and be kept away from wet and/or heat source.



The above properties and results obtained refer to the average values of laboratory testing carried out on the sample Lowry® product. Lowry® does not guarantee testing accuracy and makes no guarantee of product performance, safety, or suitability, either expressed or implied, when used alone or in combination with other products. It is essential as with all pressure sensitive tapes, that the surface to which the tape is applied must be clean, dry, and free of grease and oil. Lowry® strongly urges users to undertake independent testing in order to verify the suitability of the product for whatever intended use. Lowry® assumes no responsibility for any damage or injury sustained as a result of the use of its products.